

PRODUCT INFORMATION BULLETIN

A CONFORMABLE HIGH TEMPERATURE PRESS PAD



OVERVIEW

THERMOPADS™ are designed to be integrated into the lamination systems of High Speed Circuits in particular HDI Flexible Circuits that require functional performance under high temperatures and still offer a degree of Macro Z-Axis pressure distribution (conformability), that is not available from make shift alternatives or the typical harder base polymers offered in typical high temperature press pads. Designed to be used with ThermoFilm, it offers a consistent performance under the harsh conditions of High Temperatures above 280°C.

THERMOPADS™ High Temperature Press Pads are offered in one thickness of .044" (1.117mm). They are unique in that the core composition is made up of proprietary fibers to offer a multifaceted functionality in diverse high temperature lamination applications. High Temperature press pads typically are hard and easily become brittle and offer little z-axis benefit. THERMOPADS™ are pliable, yet durable and will leave surface areas free of any contaminants.


LAMINATION APPLICATIONS

THERMOPADS™ can be used in any high temperature lamination that requires the use of Exotic high Tg substrates. Whether you are using DuPont's Tk or your requirement is an LCP build, Thermopad with ThermoFilm offers the best conformable package with its robust attributes eliminating the uncertainty and negative impact of generic alternatives.

FEATURES

- Operating Temperatures up to 600°F (316°C) for extended press cycles
- Thickness is .044" (1.117mm)
- Predictable Control of Heat Rise excellent Thermal Conductivity due to Select uniform fiber distribution and controlled thickness and weight specifications of the Press Pad Design
- Uniform pressure throughout the pressure load.
- Maintains flexibility and minimal brittleness when used with ThermoFilm® to increase 3-Dimensional Conformance minimizing X-Y-Z axis stress on circuits
- The smooth surface of both ThermoFilm® and THERMOPADS® allows superior conformable properties against the differential surface of the circuit under high temperature conditions

RECOMMENDED LAMINATION LAY-UP

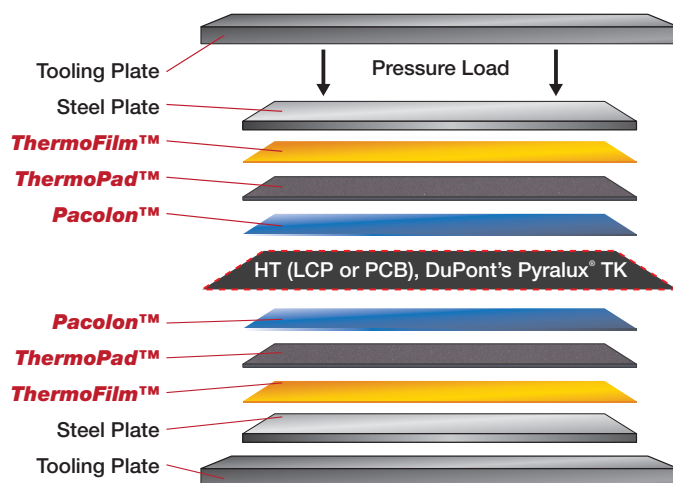

37 East Street, Winchester, MA 01890
Phone: 781-729-0927 Fax: 781-729-0929
email: sales@pacothane.com web: www.pacothane.com

PRODUCT INFORMATION BULLETIN

A CONFORMABLE HIGH TEMPERATURE PRESS PAD



AVAILABILITY

ThermoPads™ is available in custom-made sheet sizes, tooled to customer specifications. The complete line of Pacothane Technologies products is available from leading local Distributors Worldwide who offer "Just in Time" delivery from locally-available stocks.

Also from Pacothane® Technologies:

RELEASE PRODUCTS



PRESS PADS



CONFORMABLES



CONTAMINATION CONTROL



ULTRA HIGH TEMPERATURE



Information contained in this technical literature is believed to be accurate and is offered in good faith for the benefit of the consumer. Inasmuch as Pacothane® Technologies has no control over the use to which others may put the material, it does not guarantee that the same results as those described herein will be obtained. Each user of the material should make his own tests to determine the material's suitability for his own particular use. Statements concerning possible or suggested uses of the materials described herein are not to be construed as constituting a license under any Pacothane® Technologies patent or application covering such use or as recommendations for use of such materials in the infringement of any patent.

D I S T R I B U T E D W O R L D W I D E .

REPRESENTED BY:



CIPEL ITALIA SRL

Via Livorno, 8 - 13043 Cigliano (VC)
Tel. 0161 - 433 723 Fax 0161 - 433 828
e-mail: info@cipel.it www.cipel.it